



Sikadur®-33

2-part structural epoxy adhesive

Product Description

Thixotropic two part structural adhesive based on epoxy resin in a cartridge.

Uses

As a structural adhesive for:

- Concrete elements
- Hard natural stone
- Ceramics, fibre cement
- Mortar, Bricks, Blocks, Masonry, render etc.
- Steel, Iron, Aluminium
- Wood
- Polyester, Epoxy

For concrete repairs

Interior, vertical and overhead repair of:

- Corners and edges
- Hole and void filling
- Joint arrises

Joint filling and crack sealing:

- Crack filling and sealing (non moving)
- Sealing of fittings in high security installations

Metalwork, carpentry:

- Fixing and fastening of handrails, railings, balustrades and supports
- Fixing of window and door frames

For use in the following:

- Concrete
 - Hard natural stone
 - Solid rock
 - Hollow and solid masonry
 - Steel
 - Wood
-

Characteristics / Advantages

- Can be used on damp concrete
 - Excellent adhesion to the substrate
 - Non-sag, also overhead
 - High load capacity
 - Shrinkage-free hardening
 - Styrene-free
 - Pick resistant
-

Construction



Tests

Approval / Standards Testing according to EN 1504-4.

Product Data

Form

Colours
Part A: white
Part B: grey
Part A+B mixed: grey

Packaging 250 ml cartridge, 12 per box
Pallet: 60 boxes with 12 cartridges

Storage

Storage Conditions / Shelf-Life 12 months from date of production if stored properly in undamaged and unopened, original, sealed packaging in cool and dry conditions, at temperatures between +10°C and +30°C. Protect from direct sunlight.

On each Sikadur®-33 cartridge the best before date is printed.

Technical Data

Chemical Base Epoxy resin.

Density 1.35 kg/l (part A+B mixed)

Curing Speed

| Temperature  | Open Time T _{gel}  | Curing Time T _{cur}  |
|---|--|--|
| +10°C | 210 minutes | 3 days* |
| +20°C | 90 minutes | 2 days* |
| +35°C | 45 minutes | 1 day* |

* to achieve approx. 80% of the performance

Min. cartridge temperature +10°C

Sag Flow Non-sag, suitable for overhead application

Layer Thickness 0.5 mm min. / 10 mm max.

Change of Volume Shrinkage:
Hardens without shrinkage.

Thermal Expansion Coefficient Coefficient W:
9.3 x 10⁻⁵ per °C (Temp. range +23°C - +60°C) (According EN 1770)

Thermal Stability Glass transition temperature (TG):
HDT = +49°C (7 days / +23°C) (According to EN12614)

Mechanical / Physical Properties

Compressive Strength ~50 N/mm² (14 days, +23 °C)

Flexural Strength ~20 N/mm² (14 days, +23 °C)

Tensile Strength 10 - 15 N/mm² (14 days, +23 °C)

Bond Strength

| Time | Substrate | Bond strength |
|--------------|--------------------|----------------------------|
| After 3 days | Dry concrete | > 5 N/mm ² * |
| After 3 days | Damp concrete | > 5 N/mm ² * |
| After 3 days | Steel blastcleaned | > 10 N/mm ² |
| After 3 days | Brick dry | > 1.5 N/mm ² ** |

*100% concrete failure

**100% brick failure

System Information

Application Details

Substrate Quality Mortar and concrete must be older than 28 days.
Adequate substrate strength (concrete, masonry, natural stone) must always be confirmed.

Application Conditions / Limitations

Substrate Temperature +10 °C min. / +35 °C max.

Ambient Temperature +10 °C min. / +35 °C max.

Substrate Moisture Content Can be damp but not "wet". No free standing water during application and curing.

Relative Air Humidity 85% max. (at +25 °C)

Dew Point Avoid condensation during dew point conditions.
Substrate temperature during application must be at least 3 °C above dew point.


Application Instructions

Mixing


Part A : part B = 1 : 1 by volume

Mixing Tools


Getting the cartridge ready




Unscrew and remove the cap



Pull out the plug



Screw on the static mixer



Place the cartridge into the gun and start application

Important note:


When the work is interrupted the static mixer can remain on the cartridge after the gun pressure has been relieved. If the resin has hardened in the nozzle when work is resumed, a new nozzle must be attached.

Application Method / Tools


General Advice




Clean the substrate (free from oil, grease and dust, no loose or friable particles, no cement laitance).

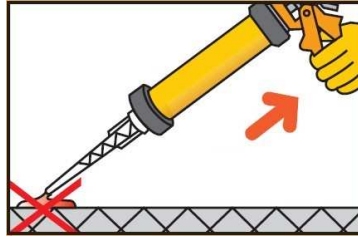

Pump approx. twice until both components start to come out uniformly. Do not use this material. Release the gun pressure and clean the end of the nozzle with a cloth.

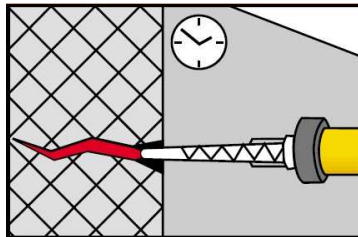

Apply the adhesive. Observe the open time.

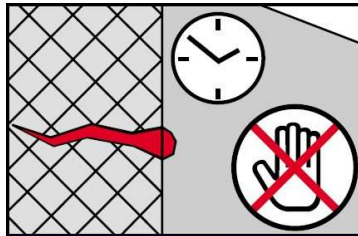

During curing / hardening the fixing must not be moved. Observe the curing time. Wash tools immediately with Sika® Colma Cleaner. Wash hands and skin thoroughly with warm soap water afterwards.

Concrete, natural stone, cement mortar and render:

Clean, free from oils and grease, no loose or friable particles, no cement laitance.

Age of concrete 3 to 6 weeks (dependent on mix design and environment).

Preparation: Blastcleaning or grinding.

Construction steel 37, V2 A steel:

Free from oil, grease, rust or mill scale. Preparation: Blastcleaning or grinding.

Avoid dew point conditions. If prepared steel is not to be used immediately, its surface must be coated with Sikagard®-62 to protect it.

Polyester, epoxy, ceramics:

Free from oils and grease. Polyester epoxy: Grind, using coarse abrasive.

Glass, ceramics: Grinding, do not apply to siliconised substrates.

Cleaning of Tools

Clean all tools and application equipment with Thinner C immediately after use. Hardened / curded material can only be mechanically removed.

Potlife

60 minutes (+23 °C)

| | |
|--------------------------------------|--|
| Value Base | All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control. |
| Local Restrictions | Please note that as a result of specific local regulations the performance of this product may vary from country to country. Please consult the local Product Data Sheet for the exact description of the application fields. |
| Health and Safety Information | For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Material Safety Data Sheet containing physical, ecological, toxicological and other safety-related data. |
| Legal Notes | The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request. |

CE Labelling

Construction

| | |
|---|-----------------------------|
| CE | |
| 0921 | |
| Sika Schweiz AG Tueffenwies 16-22 CH - 8048 Zuerich 1001 | |
| 08 | |
| 0921-CPD-2054 | |
| EN 1504-4 | |
| Structural bonding product for bonded mortar or concrete for uses other than low performance requirements | |
| Bond/adhesion strength: | Pass (concrete failure) |
| Shear strength: (hardened- hardened concrete) | $\geq 12 \text{ N/mm}^2$ |
| Compressive strength | $\geq 30 \text{ N/mm}^2$ |
| Shrinkage / expansion: | $\leq 0.1\%$ |
| Workability: | 90 min. at 23°C |
| Sensitivity to water | Pass |
| Modulus of elasticity: | $\geq 2'000 \text{ N/mm}^2$ |
| Coefficient of thermal expansion: | $\leq 100 * 10^{-6}$ |
| Glass transition temperature: | $\geq 40^\circ\text{C}$ |
| Reaction to fire | Euroclass E |
| Durability | Pass |
| Dangerous substances: (comply with 5.4) | None |

¹⁾ Last two digits of the year in which the marking was affixed

²⁾ Identification number of the notified body

³⁾ Number of the EC Certificate

⁴⁾ Number of European standard



Sika Limited
Watchmead
Welwyn Garden City
Hertfordshire
AL7 1BQ
United Kingdom

Phone +44 1707 394444
Telefax +44 1707 329129
www.sika.co.uk, email: sales@uk.sika.com

